


Overview of product data:
5DN12BD7VL356E


1/3

Lunis2 mn,recessed,mt.,med.dist.,LED



Product description

Lunis®2 mini, downlight, light steering with:
Darklight-reflector, made of plastic, aluminium vaporised, matt, light output: direct beam, LED light colour: 840 cool white, control gear: ECG-DALI, with terminal, 5-pole, max. 2.5mm², mains connection: 230V, AC, 50Hz, luminaire housing, made of plastic, white, diameter: 172 mm, clamping range: 1..40mm, mounting ring, flat, made of plastic, white, insulation class (complete): insulation class I (protective earthing), approval mark: CE, ENEC being prepared, protection symbol: F, ambient temperature limit for indoor applications: ≤ +25°C,

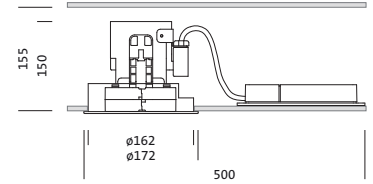

Lamps: LED cw
Wt. (kg): 1.9
Order No.: 5DN12BD7VL356E
EAN: 4050737054629

Product data details:
5DN12BD7VL356E

Lunis2 mn,recessed,mt.,med.dist.,LED

2/3



Detailed technical description

Key data

- Product type: downlight
- Family: Lunis®2 mini
- Order No.: 5DN12BD7VL356E

Lighting technology | Lamps | Ballast

Components 1

Lighting technology:

- Light control: Darklight-reflector of plastic, aluminium vaporised, matt
- Beam angle: medium distribution
- Symmetry: rotationally symmetrical
- Light emission: direct distribution

Lamps:

- Light source: LED cw
- Initial luminous flux: 2000lm
- Luminous efficacy: 65lm/W
- Light colour: 840 cool white

Ballast:

- Ballast: ECG DALI

Material | Colour

- luminaire housing: plastic, white
- mounting ring: plastic, white, flat, similar to RAL 9016

Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Ø of ceiling cut-out: 162 mm
- Clamping range: 1..40mm

Electrical Connection

- Connection: terminal, 5-pole, max. 2.5mm²
- Nominal voltage: 230V, AC, 50Hz

Dimensions | Weight

- Diameter: 172 mm
- Weight: 1.9 kg

Approval

- Insulation class: insulation class I (protective earthing)
- Protection symbol: F
- Permissible ambient temperature: ≤ +25°C
- Certification: CE, ENEC being prepared

Dimensions:

5DN12BD7VL356E

Lunis2 mn,recessed,mt.,med.dist.,LED

3/3

