




Overview of product data:  
**5MJ223D1QS**

**SILUETTE, 1x35/49/80W, T16, ECG-MW-DALI**



**Product description**

SILUETTE®, diffuser luminaire, primary light steering with: specular reflector, made of aluminium, highly specular, primary anti glare: High Definition Prismatic (HDP®), primary enclosure: enclosure, made of PMMA, transparent, light output: direct beam, primary light characteristic: symmetric, installation mode: suspended mounting, surface-mounted, for 1 x T16 35/49/80W, control gear: ECG-Multiwatt-DALI, with terminal, 5-pole, max. 2.5mm<sup>2</sup>, mains connection: 230V, AC, 50Hz, housing, made of sheet steel, coil coated, metallic grey (RAL 9006), length: 1.492 mm, width: 214 mm, height: 76mm, mounting bracket, made of aluminium, coated, metallic grey (RAL9006), end cap, made of PS, graphite (RAL7037), protection rating (complete): IP50, insulation class (complete): insulation class I (protective earthing), approval mark: CE, ENEC, VDE, protection symbol: D / F, ambient temperature limit for indoor applications: +10°C..+25°C, standard: EN 50419, packing unit: 1 piece,

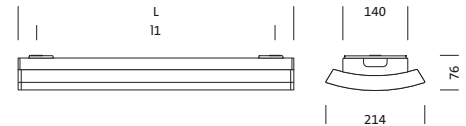


	L	l1
T16 14/24W	592	512
T16 28/54W	1192	1112
T16 35/49/80W	1492	1412



Lamps: 1x T16 35/49/80W  
 Socket: G5  
 Wt. (kg): 4.5  
 Order No.: 5MJ223D1QS  
 EAN: 4039806541598

**Product data details:**  
**5MJ223D1QS**
**SILUETTE,1x35/49/80W,T16,ECG-MW-DALI**

2/3


**Detailed technical description**
**Key data**

- Product type: diffuser luminaire
- Family: SiLUETTE®
- Order No.: 5MJ223D1QS

**Lighting technology | Lamps | Ballast**
**Components 1**
**Lighting technology:**

- Light control: specular reflector of aluminium, highly specular
- Cover: enclosure, transparent
- Glare reduction: High Definition Primitives (HDP®)
- Symmetry: symmetric distribution
- Light emission: direct distribution

**Lamps:**

- Light source: fluorescent lamp, 1x T16 35/49/80W
- Socket: G5
- Supplement: with terminal, without connection cable, without through wiring, without lamps, without fuse

**Ballast:**

- Ballast: ECG Multiwatt(DALI)

**Material | Colour**

- housing: sheet steel, coil coated, metallic grey (RAL 9006), with rapid mounting bracket
- mounting bracket: aluminium, coated, metallic grey (RAL9006), mounting bracket included with supply
- Quantity: 2 pcs.
- end cap: PS, graphite (RAL7037)
- Cover: enclosure of PMMA

**Mounting**

- Mounting method, mounting location: suspended mounting, surface-mounted, to double wire suspension, to Y-wire suspension, to the ceiling, to the mounting rail, to the wall
- Arrangement: single/continuous arrangement

**Electrical Connection**

- Connection: terminal, 5-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 230V, AC, 220..240V, 50Hz

**Dimensions | Weight**

- Length: 1492 mm
- Width: 214 mm
- Height: 76mm
- Weight: 4.5 kg


**Approval**

- Protection rating: IP50
- Insulation class: insulation class I (protective earthing)
- Protection symbol: D / F
- Permissible ambient temperature: +10°C..+25°C
- Standard: EN 50419
- Certification: CE,ENEC,VDE

Dimensions:  
5MJ223D1QS

SILUETTE,1x35/49/80W,T16,ECG-MW-DALI

3/3

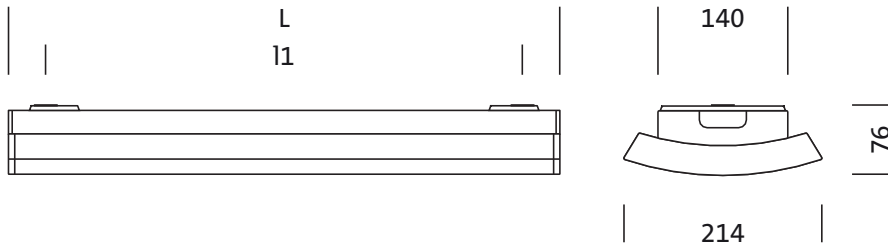

	L	l1
T16 14/24W	592	512
T16 28/54W	1192	1112
T16 35/49/80W	1492	1412