


Overview of product data:
5LJ90930E1


1/3

DUS IP20, trunk.rail, 3-length, 4.605 mm



Product description

DUS® IP20, trunking rail, made of sheet steel, coated, pure white, 3-length, length: 4.605 mm, width: 68 mm, height: 55mm, through wiring: 7 x 2.5mm², with terminal, 7-pole, max. 2.5mm², for 35/49/58/80W, protection rating (complete): IP20 / IP60, insulation class (complete): insulation class I (protective earthing), approval mark: CE, ENEC being prepared, protection symbol: F, IP60 for complete luminaire system achieved in combination with corresponding IP60 components, packing unit: 1 piece,

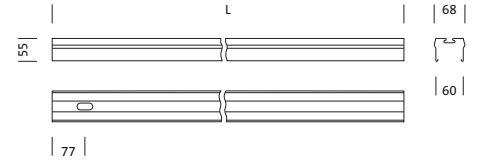


Wt. (kg): 7.3
Order No.: 5LJ90930E1
EAN: 4039806137951

Product data details:
5LJ90930E1

DUS IP20, trunk.rail, 3-length, 4.605 mm

2/3



Detailed technical description

Key data

- Product type: trunking components group (TS)
- Family: DUS® IP20
- Order No.: 5LJ90930E1

Material | Colour

- trunking rail: sheet steel, coated, pure white, 3-length

Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to the ceiling
- Arrangement: single/continuous arrangement

Electrical Connection

- Connection: terminal, 7-pole, max. 2.5mm²

Dimensions | Weight

- Length: 4605 mm
- Width: 68 mm
- Height: 55mm
- Mounting distance: max. 3.5m
- Weight: 7.3 kg

Approval

- Protection rating: IP20 / IP60
- Insulation class: insulation class I (protective earthing)
- Protection symbol: F
- Certification: CE, ENEC being prepared

Dimensions:
5LJ90930E1

DUS IP20, trunk.rail, 3-length, 4.605 mm

3/3

