


Overview of product data:  
**5AA17370V**
**CL-Linear90,1x21/39W,T16,ECG-MW,TSG**

1/3


**Product description**

CL LINEAR 90, linear fluorescent luminaire, primary light steering with: reflector, made of aluminium, highly specular, primary enclosure: cover glass, made of toughened safety glass, transparent, primary light steering with: Fresnel lens, made of PMMA, transparent prismatic structure, installation mode: surface-mounted, for 1 x T16 21/39W, control gear: ECG-Multiwatt, with terminal, 3-pole, max. 1.5mm<sup>2</sup>, through wiring: 3 x 1.5mm<sup>2</sup>, mains connection: 230V, AC/DC, 50/60Hz, housing, made of extruded aluminium section, powder-coated, Siteco® metallic grey (DB 702S), length: 900 mm, width: 60 mm, height: 126mm, end cap, made of diecast zinc, Siteco® metallic grey (DB 702S), protection rating (complete): IP65, insulation class (complete): insulation class I (protective earthing), approval mark: CE,ENEC,VDE, packing unit: 1 piece,

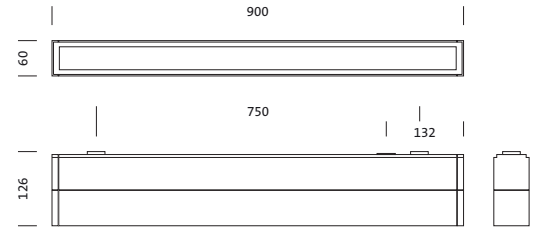

Lamps:	1x T16 21/39W
Socket:	G5
Wt. (kg):	6.5
Order No.:	5AA17370V
EAN:	4039806847560

Product data details:  
**5AA17370V**

**CL-Linear90,1x21/39W,T16,ECG-MW,TSG**

2/3



#### Detailed technical description

##### Key data

- Product type: linear fluorescent luminaire
- Family: CL LINEAR 90
- Order No.: 5AA17370V

##### Lighting technology | Lamps | Ballast

##### Components 1

##### Lighting technology:

- Light control: reflector of aluminium, highly specular
- Cover: cover glass, transparent

##### Lamps:

- Light source: fluorescent lamp, 1x T16 21/39W
- Socket: G5

##### Ballast:

- Ballast: ECG Multiwatt

##### Components 2

##### Lighting technology:

- Light control: Fresnel lens of PMMA, transparent prismatic structure
- Beam angle: wide distribution
- Symmetry: symmetric distribution

##### Material | Colour

- housing: extruded aluminium section, powder-coated, Siteco® metallic grey (DB 702S)
- end cap: diecast zinc, Siteco® metallic grey (DB 702S)
- Cover: cover glass of toughened safety glass

##### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling
- Arrangement: single/continuous arrangement

##### Electrical Connection

- Connection: terminal, 3-pole, max. 1.5mm<sup>2</sup>
- Nominal voltage: 230V, AC/DC, 50/60Hz

##### Dimensions | Weight

- Length: 900 mm
- Width: 60 mm
- Height: 126mm
- Weight: 6.5 kg

##### Approval

- Protection rating: IP65
- Insulation class: insulation class I (protective earthing)
- Certification: CE,ENEC,VDE

Dimensions:  
5AA17370V

CL-Linear90,1x21/39W,T16,ECG-MW,TSG

3/3

