


Overview of product data:
5LS322D1E


FR200,1x58W,T26,ECG,DALI,PMMA,dir/ind

1/3



Product description

FR 200, damp proof luminaire, primary light steering with: reflector, made of sheet steel, white, primary enclosure: enclosure, made of PMMA, inner prismatic structure, light output: direct/indirect beam, primary light characteristic: symmetric, installation mode: suspended mounting, surface-mounted, for 1 x T26 58W, control gear: ECG-DALI, with terminal, 3+2-pole, max. 2.5mm², mains connection: 230V, AC, 50Hz, housing, made of glass-fibre reinforced polyamide, uncoated, bright grey, length: 1.577 mm, width: 127 mm, height: 108mm, clip for cover, made of PBT and V2A, protection rating (complete): IP65, insulation class (complete): insulation class I (protective earthing), approval mark: CE,ENEC,VDE, protection symbol: D / F, ambient temperature limit for indoor applications: +10°C..+25°C, standard:EN 50419, packing unit: 1 piece,

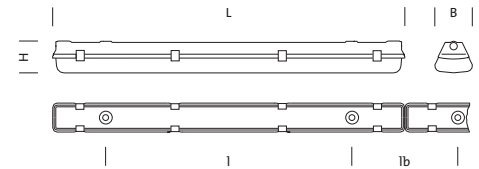

	L	l	lb	B	H
1xT26 18W	667	330	335	127	108
1xT26 36W	1277	800	475	127	108
1xT26 58W	1577	1100	475	127	108
2xT26 36W	1277	800	475	160	125
2xT26 58W	1577	1100	475	160	125



Lamps: 1x T26 58W
 Socket: G13
 Wt. (kg): 3.5
 Order No.: 5LS322D1E
 EAN: 4039806512970

Product data details:
5LS322D1E
FR200,1x58W,T26,ECG,DALI,PMMA,dir/ind

2/3


Detailed technical description
Key data

- Product type: damp proof luminaire
- Family: FR 200
- Order No.: 5LS322D1E

Lighting technology | Lamps | Ballast
Components 1
Lighting technology:

- Light control: reflector of sheet steel, white
- Cover: enclosure, inner prismatic structure
- Beam angle: wide distribution
- Symmetry: symmetric distribution
- Light emission: direct/indirect distribution
- UGR viewing direction along longitudinal luminaire axis: < 19
- UGR viewing direction along lateral luminaire axis: < 22

Lamps:

- Light source: fluorescent lamp, 1x T26 58W
- Socket: G13
- Supplement: without through wiring, without fuse

Ballast:

- Ballast: ECG DALI

Material | Colour

- housing: glass-fibre reinforced polyamide, uncoated, bright grey
- clip for cover: PBT and V2A, PBT catch element with aid of a V2A bracket
- Quantity: 10 pcs.
- Cover: enclosure of PMMA

Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to wire suspension, to the ceiling, to the mounting rail
- Arrangement: single/continuous arrangement

Electrical Connection

- Connection: terminal, 3+2-pole, max. 2.5mm²
- Nominal voltage: 230V, AC, 230..240V, 50Hz

Dimensions | Weight

- Length: 1577 mm
- Width: 127 mm
- Height: 108mm
- Weight: 3.5 kg


Approval

- Protection rating: IP65
- Insulation class: insulation class I (protective earthing)
- Protection symbol: D / F
- Permissible ambient temperature: +10°C..+25°C
- Standard: EN 50419
- Certification: CE,ENEC,VDE

Dimensions:
5LS322D1E

FR200,1x58W,T26,ECG,DALI,PMMA,dir/ind

3/3

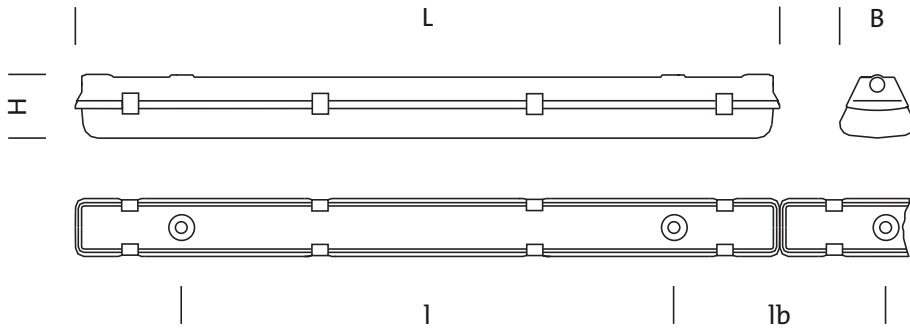

	L	l	lb	B	H
1xT26 18W	667	330	335	127	108
1xT26 36W	1277	800	475	127	108
1xT26 58W	1577	1100	475	127	108
2xT26 36W	1277	800	475	160	125
2xT26 58W	1577	1100	475	160	125